

OG-Pinnacle-C SDI TO HDMI/DVI CONVERTER/SCALER WITH REGION OF INTEREST

Key Features

- openGear 3.0 card-based form factor
- 3G/HD/SD-SDI to SDI/HDMI converter/scaler
- Crop and Zoom for Region of Interest (ROI)
- Shift horizontally or vertically
- Built-in scaler/de-interlacer
- SDI output that matches HDMI output
- Remote control for preset recall
- Automatic input aspect ratio detection
- 5 year limited warranty

Original Image



Post Crop and Zoom



Rear Module Options (Occupies 2 Slots)

OG-Pinnacle-C-RM

- 1 x BNC Input
- 1 x BNC Output
- 1 x HDMI Output
- 1 x RJ50 for GPI/Tally
- 1 x 3-pin Connector for AA Out

Standard Accessories

- RJ50 to DB9 (for GPI)
- DB9 to Terminal Block (for GPI)

OG-Pinnacle-C-RM-x


- 1 x BNC Input
- 1 x BNC Output
- 1 x RJ45 (Extended HDMI Output)
- 1 x RJ50 for GPI/Tally
- 1 x 3-pin Connector for AA Out


Standard Accessories

- RJ50 to DB9 (for GPI)
- DB9 to Terminal Block (for GPI)
- 1 x 15 ft CAT6 cable
- 1 x RJ45 to HDMI (HDMI-SR)
- 1 x RJ45 to DVI (DVI-SR)

Optional Accessories for RM-x

- HDMI-1-R
(Active HDMI Receiver that supports 1080p resolution up to 115 ft /35m)
- DVI-1-LR
(Active DVI Receiver that supports 1080p resolution up to 115 ft /35m)
- VGA-Rec
(VGA output receiver that supports 1080p resolution up to 35 ft /10m)

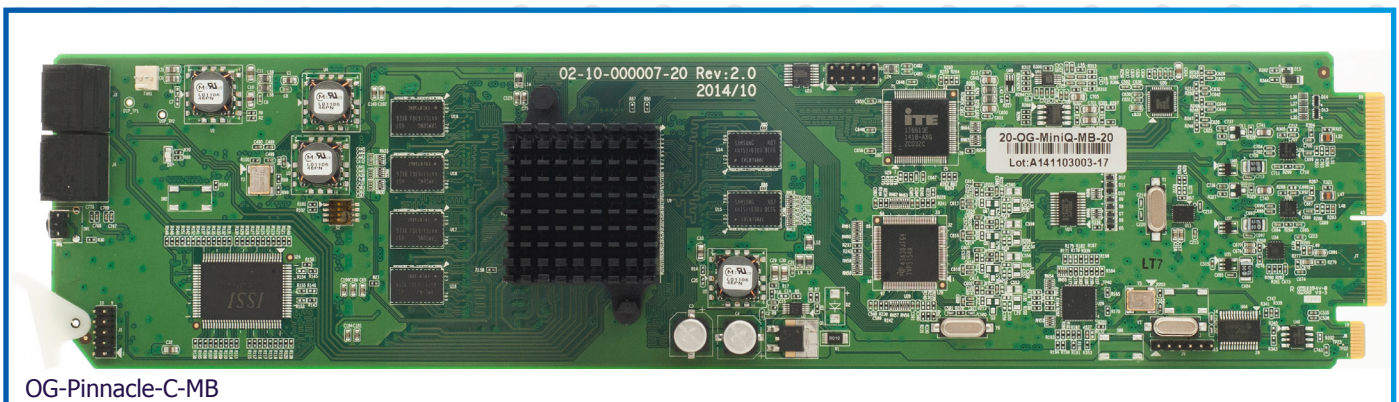

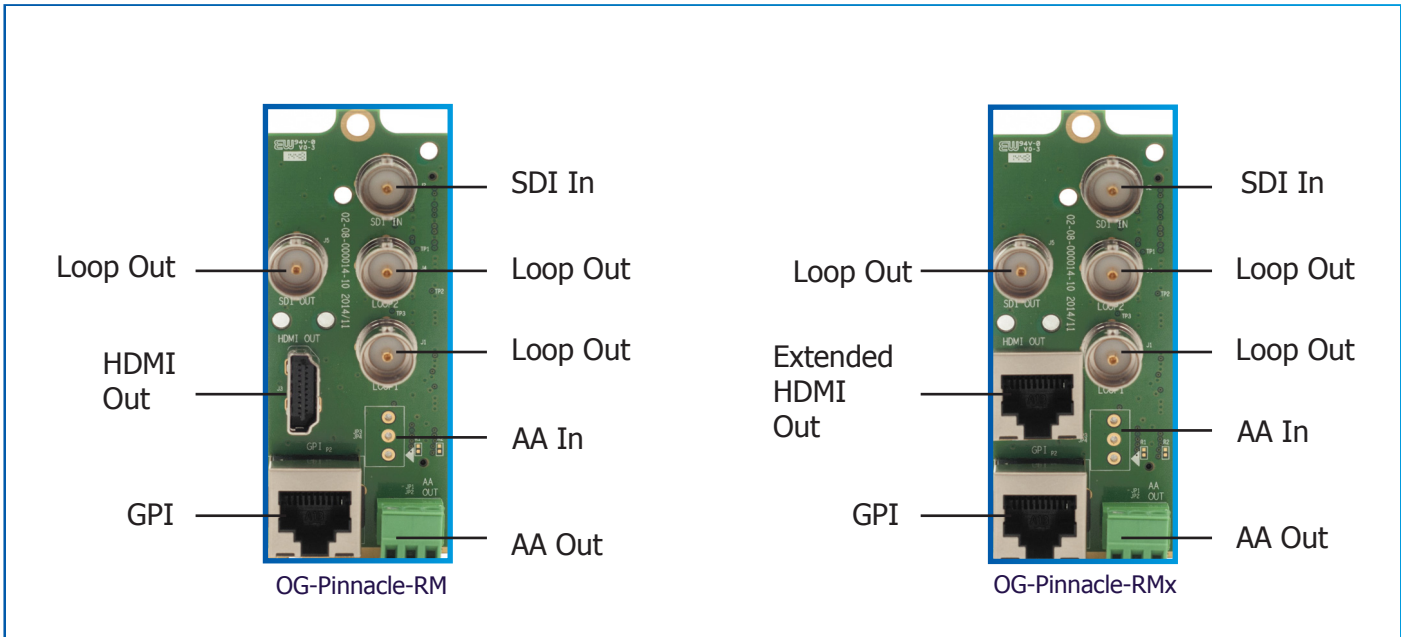

How to Order

- OG-Pinnacle-C-SET-1: OG-Pinnacle-C-MB + OG-Pinnacle-C-RM
- OG-Pinnacle-C-SET-2: OG-Pinnacle-C-MB + OG-Pinnacle-C-RMx

SPECIFICATIONS			
Total Windows	1	Output	1 x HDMI/DVI, 1 x SDI HDM and SDI has embedded audio
Inputs	3G/HD/SD-SDI/Composite	HDMI (OG-Pinnacle-RM)	800x480 to 1920x1200 (1080p) 50/59.94/60Hz
Serial Digital	SMPTE 424M 292M, 259M	RJ45 (OG-Pinnacle-RMx)	Up to 35 feet with passive receiver Up to 115 feet with active receiver (option)
Equalization	120m at 2.97 Gbps, 140m at 1.48 Gbps, 400m at 270 Mbps with Belden 1694A	SDI	Matching the HDMI output resolution up to 3G
Return Loss	> 15db up to 1.485 Gbps, > 10db up to 3G	Input Loopout	SDI only. The loop out will not work with composite inputs
Embedded Audio	SMPTE-272M-A	GPI	8 for tally or AXP (ASCII command)
Composite	NTSC (SMPTE-170M), PAL (ITU624-2)	IP	100 Base-T, TSL, AXP_Lite protocol
Signal Level	1V nominal	Power	15W
DC Offset	0V, + - 0.1V		