

APPLICATIONS

- GUITAR / KEYBOARDS
- SOUND MIXERS
- PA SYSTEMS
- TEST PROBES
- HI-FI INTERCONNECTS

Canare offers in-line cable mount audio plugs in a variety of configurations for the discriminating professional. Each model is carefully designed to accommodate small to large O.D. cables and all versions offer a generous soldering area for easy wiring assembly, good electromechanical characteristics, super performance and long life durability.

FEATURES

- Robust Dependable Construction**
- Brass with Nickel/Gold Plating**
- 360° Crimpable Cable Strain Relief**
- Easy to Solder**
- Beautiful Long Lasting Finish**

F-09 and F-10 plugs have a Gold plated brass inner shaft that offers low contact resistance and eliminates corrosion problems with the mating receptacle.

Canare F-Series audio plugs feature a proprietary 360° cable clamp design that ensures long life reliability.

All F-Series audio plugs have a beautiful nickel plated, bell brass handle with a specially designed knurled surface to prevent finger slippage.


The F-09 RCA plug features an extra narrow profile body (for high density panels). The handle extends over the outer contact sleeve for improved RF shielding.

Spring type strain relief prevents cable damage due to repeated bending at the connector entry point; cable lasts three times longer than plugs without strain relief.



F-10

Reinforced one-piece body and sleeve includes a pure brass bar that runs the length of the handle; 50% stronger than ordinary plugs and 20% stronger than other high-grade plugs.

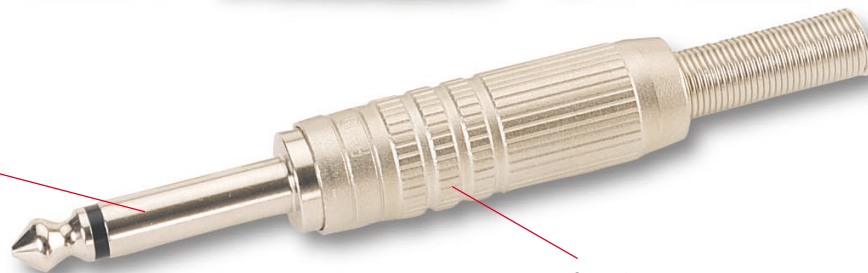

F-15

Satin-finished, nickel-plated solid brass handle, shuts out static and electromagnetic noise.

Canare F-15 and F-16 1/4" phone plugs use a patented "V-Lock" system that ensures good electrical contact by keeping the plugs tight where others pull out.




F-09



F-11



F-16



F-12

CONNECTOR SPECIFICATIONS									
Model	Type	Notes	Cable Entry I.D. in (mm)	* Max Cable O.D. in (mm)	Shaft material plating	Dielectric	Body material plating	Insulation tube	Cable spring plating
F-09	RCA	Narrow profile. Body extends over contact	.248 6.3	.236 6.0	Brass Gold	Polyacetal	Brass Nickel	-	Nickel
F-10	RCA	Deluxe clamp and body design	.244 6.2					PTFE	
F-11	Mini Phone TS	Tip, Sleeve	6.2		Brass Nickel	-		-	
F-12	Mini Phone TRS	Tip, Ring, Sleeve	.248 6.3					Black PVC	
F-15	1/4" TS phone	Tip, Sleeve	.244						
F-16	1/4" TRS phone	Tip, Ring, Sleeve	6.2						

* With Spring Removed, Max. Cable O.D. is .295in (7.5mm)